

FABX1

8 - 10m RTFA

TECHNICAL DATA SHEET - ISSUE 1.1



The FABX1 is available with galvanised or stainless steel cable, or Dyneema® Fibre rope/webbing in lengths up to 10m. The FABX1 offers lightweight handling, excellent serviceability and exceptional performance.



Independent Brake Pawls

The two pawls work independently of one another, this ensures a "fail safe" capability if one should stop working.




Load Bearing Steel Chassis

The internal hot rolled steel chassis provides a structural metallic core beneath the external protective housing.



Carry Handle Attachments

Optional shoulder strap and carrying handle are available which can be easily fitted by the user.




Fall Indicator Hook

The swivel hook includes a fall indicator, which clearly shows if the device has been subjected to a shock load.



Sealed Brake Module

The brake module is sealed by the use of "O" rings which stops water or dust ingress affecting the brake's efficiency.



BCS Brush Cleaning System


The entry aperture has a pair of opposing brushes to minimise take up of debris into the device.

FABX1

8 - 10m RTFA

TECHNICAL DATA SHEET - ISSUE 1 1

| Prod. Code | Description | Weight |
|------------|----------------------------|--------|
| FABX1-10C | 10m - Galvanised wire | 4.1kg |
| FABX1-10CS | 10m - Stainless steel wire | 4.3kg |
| FABX1-10F | 10m - Dyneema® rope | 3.5kg |
| FABX1-8W | 8m - Dyneema® webbing | 3.5Kg |

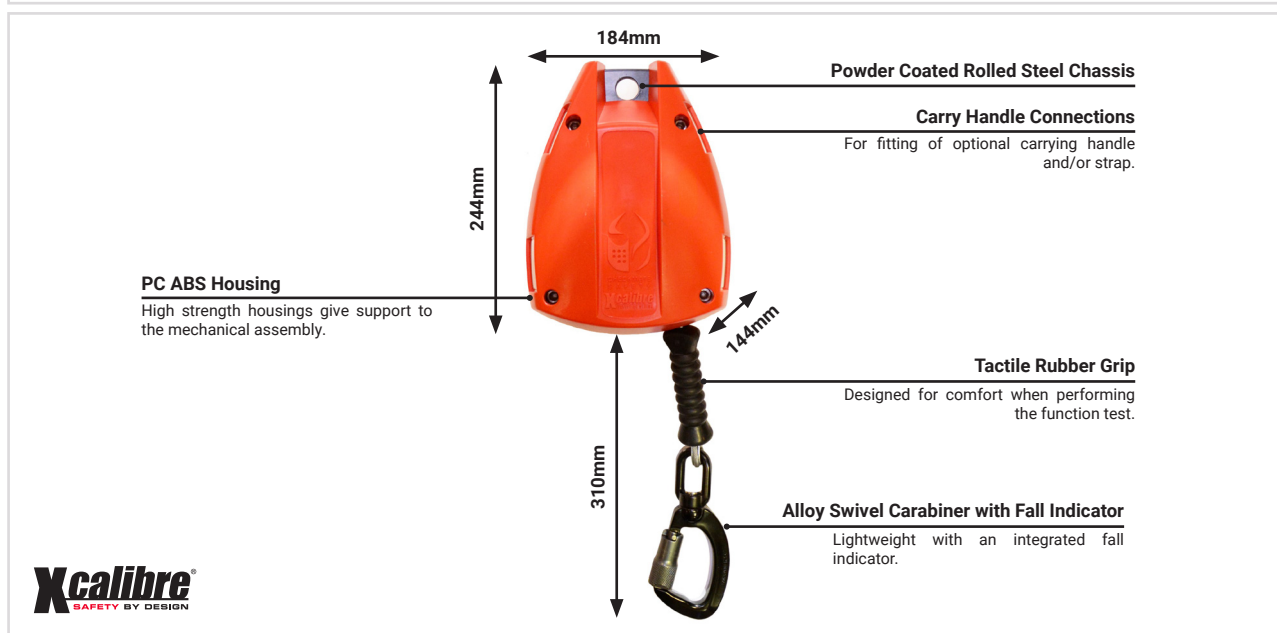

Features

- **Capacity**
8 - 10m
- **Tactile Rubber Hand Grip**
Designed for comfort when performing function test
- **PC/ABS Housing**
Lightweight, high strength housing
- **Independent Brake Pawls**
The two pawls work independently of one another, this ensures a "fail safe" capability.
- **Carry Handle Attachment**
Optional shoulder strap and carrying handle are available which can be easily fitted by the user
- **User Weight**
136kg inc. tools and equipment

Standards

- EN360:2002
- ANSI Z359.14:2014 CLASS B
- ANSI A10.32:2012
- OSHA 1910 & 1926



Dyneema® and Dyneema® are trademarks of DSM. Use of these trademarks is prohibited unless strictly authorized.