

TECHNICAL DATA SHEET QUADPLEX WEB SLINGS


TDS140



Quadplex Webslings Technical Data Sheet

Checkmate Quadplex Webslings

Checkmate quadplex webslings are available in a range of lengths and tonnage colour coded accordingly for easy identification.

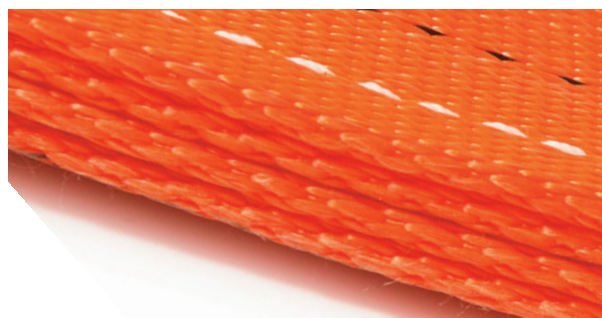

product features

- ▶ SWL: 12t up to 42t- colour coded
- ▶ Widths: 240mm or 300mm single
480mm or 600mm side by side
- ▶ Factor of safety: 7:1
- ▶ Eyes: Becket, flat, reversed, twisted or a range of compatible hardware
- ▶ High strength to weight ratio
- ▶ Absorbs shock loads
- ▶ Light and flexible makes them easy to handle
- ▶ Wear sleeves available to protect from abrasion and sharp objects
- ▶ Helps prevent damage to the surface of goods being lifted
- ▶ Unaffected by grease or oil
- ▶ Certificates of conformity are supplied with goods
- ▶ Easily examined
- ▶ Side by side option available for distribution of the load over a greater area. i.e. for lifting boats

principal materials

- ▶ Polyester

standards

- ▶ EN1492-1:2000

ordering information

Part No.	Description	Weight
▶ QUAD# *	Various lengths and tonnage quadplex web slings	N/A
▶ QUAD-D# *	Two quadplex slings sewn together side by side	N/A

= Length e.g. 10M = 10 metres

* = Tonnage e.g. 12T = 12 tonnes



CHECKUSOUT

www.checkmatesafety.co.uk



The information on this data sheet is for marketing purposes only and Checkmate reserves the right to amend at any time without notice. The information must not be relied on for use, which must be obtained from the product marking and user information.

TDS140 ISSUE 04