

LRA

Restraint Lanyards

Technical Data Sheet

Key Features

- **Length - Adjustable**
1.3m to 1.8m
- **Six (6) different connectors**
- **Durable screw gate connector**
- **Water-repellent webbing**
for easy inspection and cleaning

Standards

- EN 354:2010
- EN 358:2018



Lanyard Shown #36041

For more information please call:

+44 (0) 1795 580 333

or email:

enquiries@checkmatesafety.co.uk



Designed, Tested,
and Assembled in the
United Kingdom

www.checkmatesafety.co.uk


LRA

Restraint Lanyards

Technical Data Sheet



Prod. Code	Description	Length	Hook Type
36030	Adjustable webbing restraint lanyard	1.3 to 1.8m	Steel Snap Hook
36031	Adjustable webbing restraint lanyard	1.3 to 1.8m	Steel Scaffold Hook
36038	Adjustable webbing restraint lanyard	1.3 to 1.8m	Aluminium Snap Hook
36040	Adjustable webbing restraint lanyard	1.3 to 1.8m	Aluminium Scaffold Hook
36041	Adjustable webbing restraint lanyard	1.3 to 1.8m	Aluminium Karabiner
36042	Adjustable webbing restraint lanyard	1.3 to 1.8m	Steel Karabiner

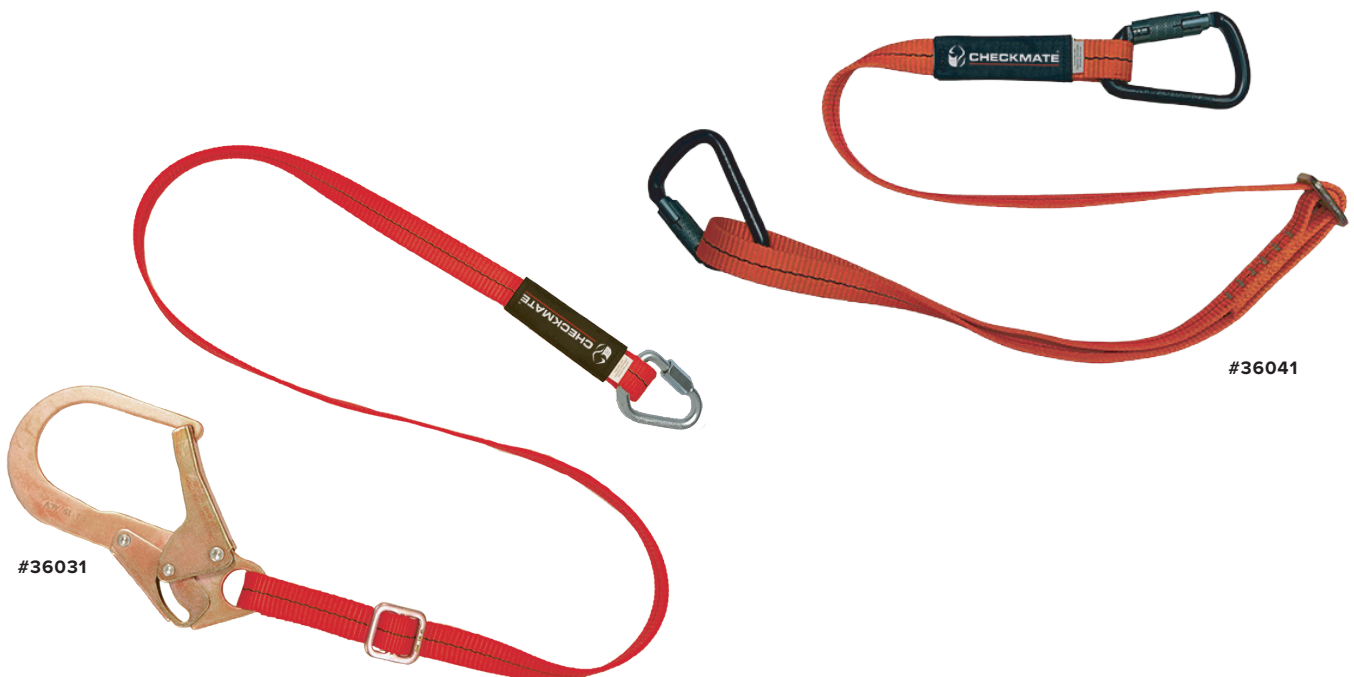

Materials

- Polyester, galvanised steel, aluminium

User Weight

- 59 kg - 140 kg

Lifespan

Checkmate products that consist of textile components of any kind have a maximum lifespan of 10 years from the date of manufacture.

Cleaning

Textiles must only be cleaned with plain water (not exceeding 50°C) or, if plain water is not sufficient, with a mild soap/water solution.

Inspection

Prior to EACH use, inspect the equipment and connection points for signs of deficiencies, including, but not limited to, corrosion, deformation, pits, burrs, rough surfaces, sharp edges, cracking, rust, paint build-up, excessive heating, alteration, broken stitching, fraying, missing or illegible labels.

Compliance

This product is fully compliant with the following safety regulations: **EN 354:2010** and **EN358:2018**